


NOTE THIS DRAWING IS FOR GUIDANCE ONLY AND MUST NOT BE USED AS A PROPER WORKING DRAWING.

Vertical Lift Platform Specification

- Load: 300kg / 2 persons
- Drive: Direct driven screw and nut
- Speed: 0.06m / sec
- Travel: Min 0.6m / Max 3m
- Stops: 2
- Motor: 1.1kw
- Power: 400v 3ph 50Hz 10A
- Colour: RAL 7031 as standard
(alternative RAL colours available)

Building work required

- 1 - Provide power supply
- 2 - Provide upper floor adequate for fixing the guides
- 3 - Provide level surface on lower and upper level

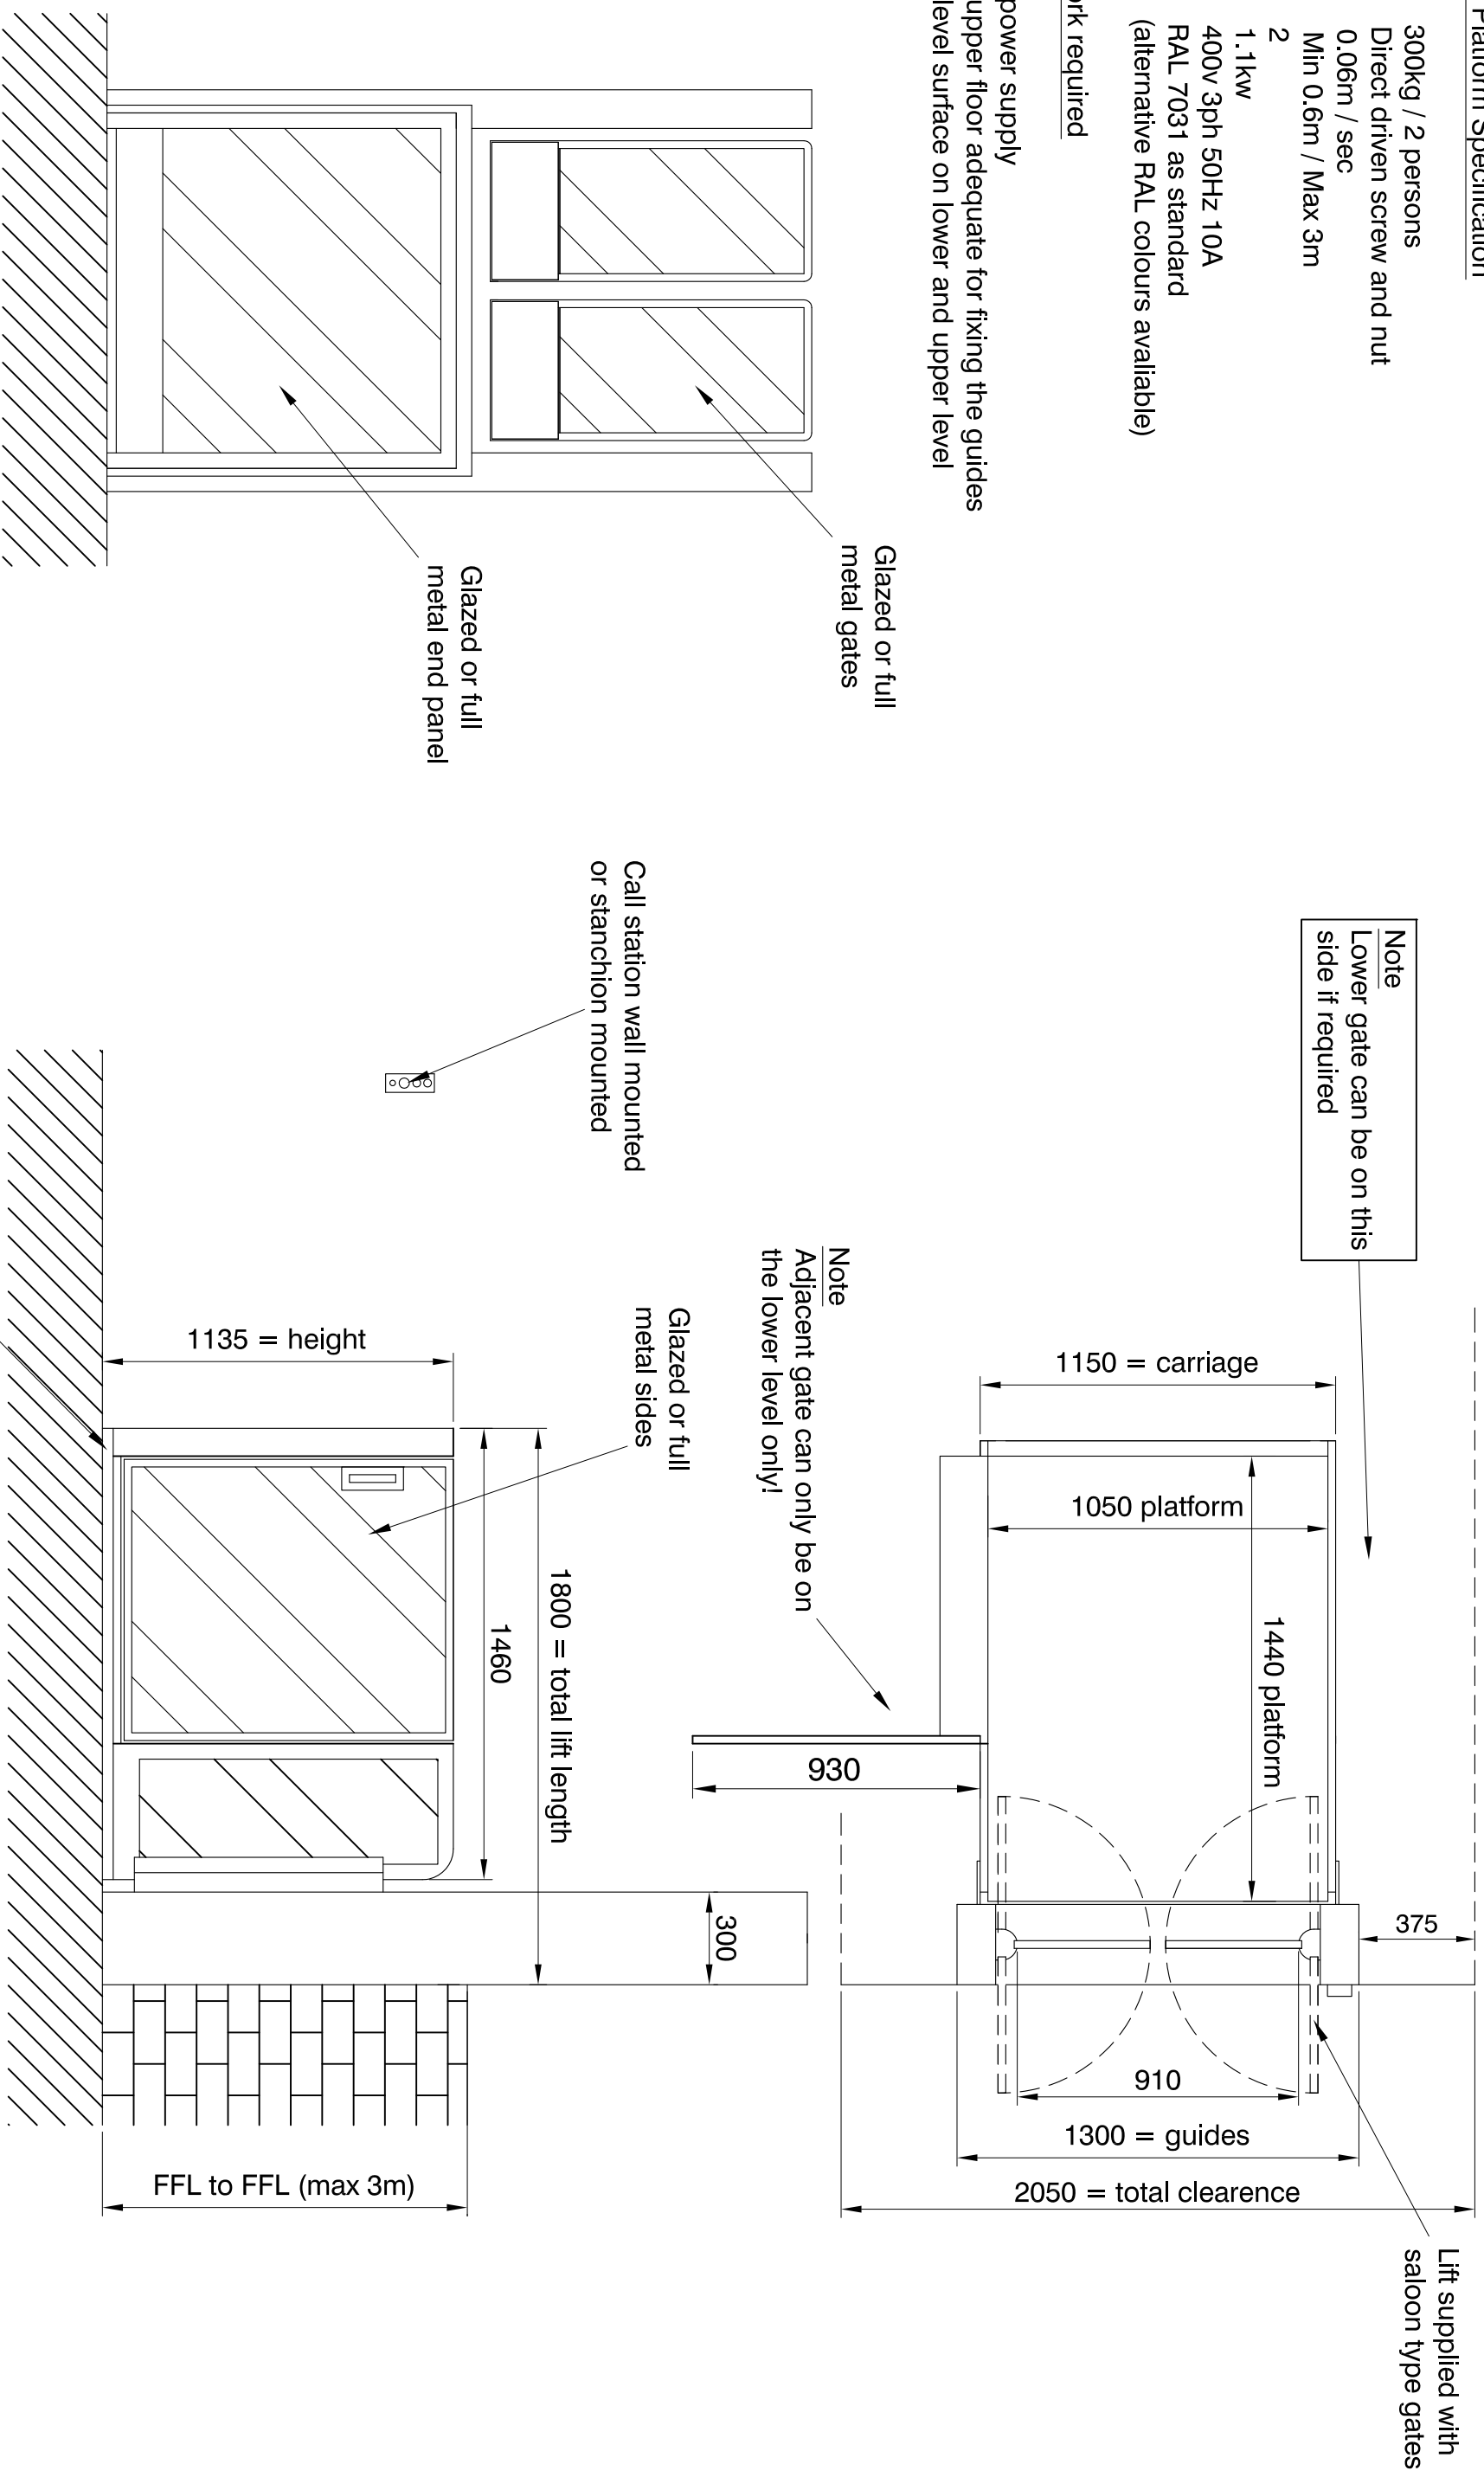

Note
Lower gate can be on this side if required

Note
Adjacent gate can only be on the lower level only!

Lift supplied with saloon type gates

Underside of the platform protected with safety edge



NTD
 Hissvägen 3
 691 37 Karlskoga, Sweden
 Tel . +46 (0)586-63730
 Fax . +46 (0)586-52140
 E-mail . info@ntd.se
 website . www.ntd.se

TITLE		REV	
B-Type Vertical Platform Lift - 300kg		A	
DWG. NO.		---	
SCALE	DATE	DRAWN	
NTS	26/09/06	RH	