




NOTE THIS DRAWING IS FOR GUIDANCE ONLY AND MUST NOT BE USED AS A PROPER WORKING DRAWING.

Vertical Lift Platform Specification

- Load: 300kg / 2 persons
- Drive: Direct driven screw and nut
- Speed: 0.06m / sec
- Travel: Min 0.6m / Max 3m
- Stops: 2
- Motor: 1.1kw
- Power: 400 3ph 50Hz 10A
- Colour: RAL 7031 as standard  
(alternative RAL colours available)

Building work required

- 1 - Provide power supply
- 2 - Provide upper floor adequate for fixing the guides
- 3 - Provide level surface on lower and upper level

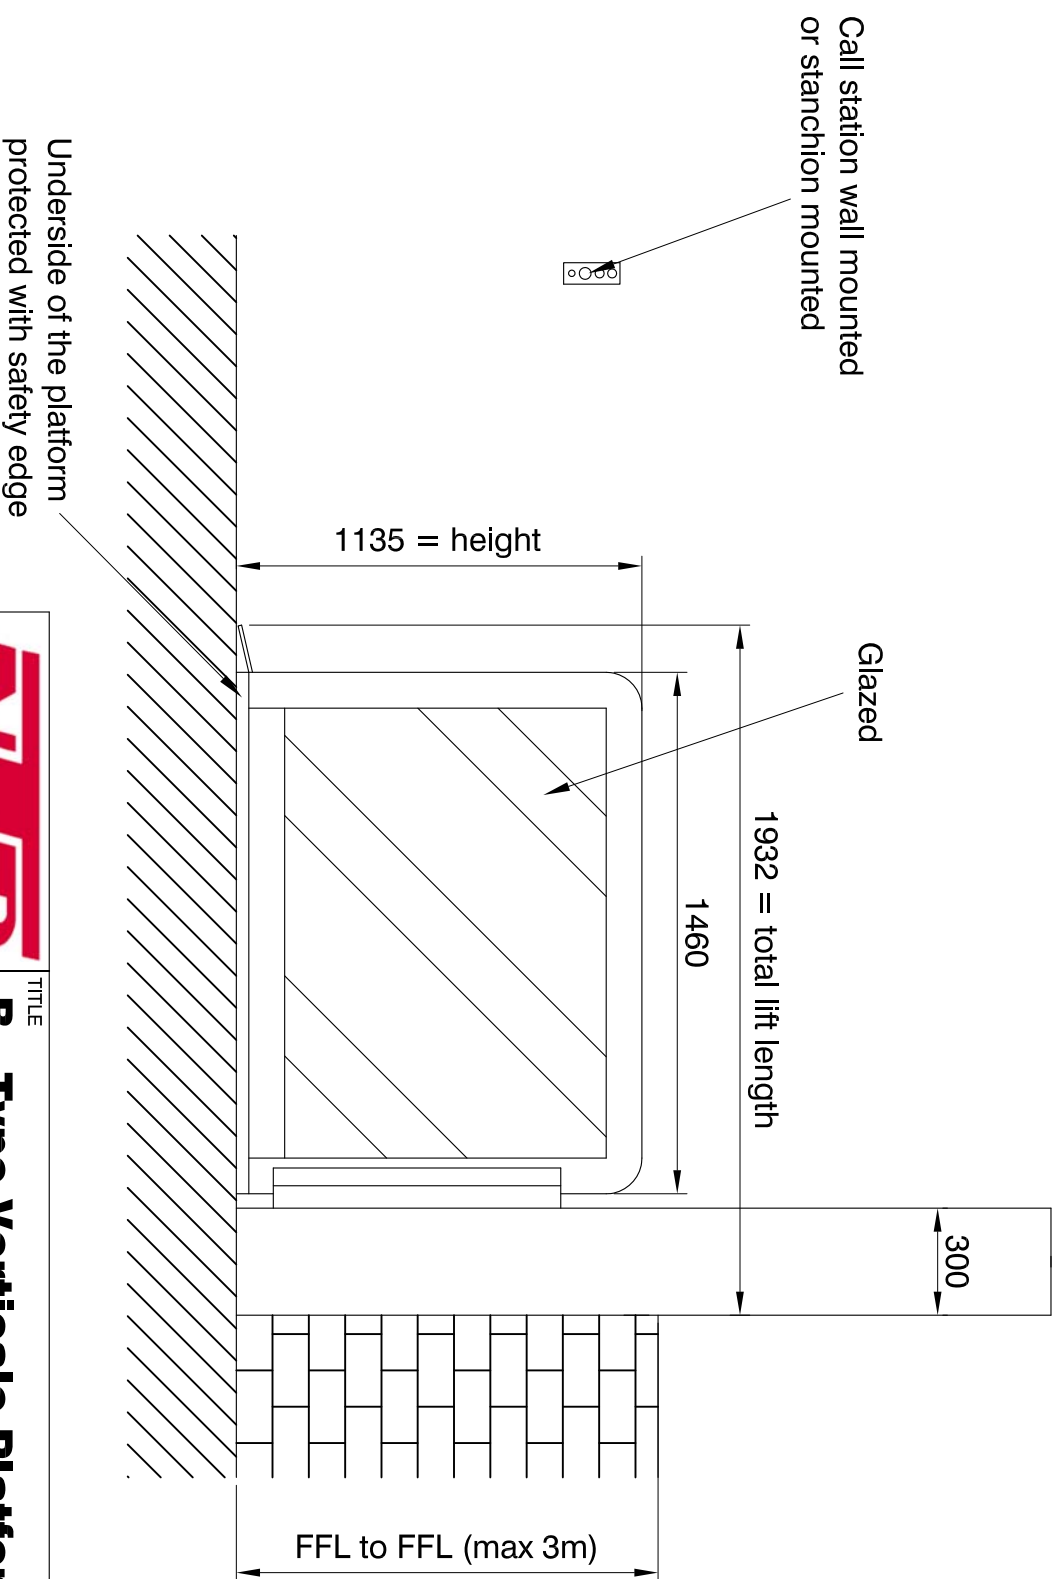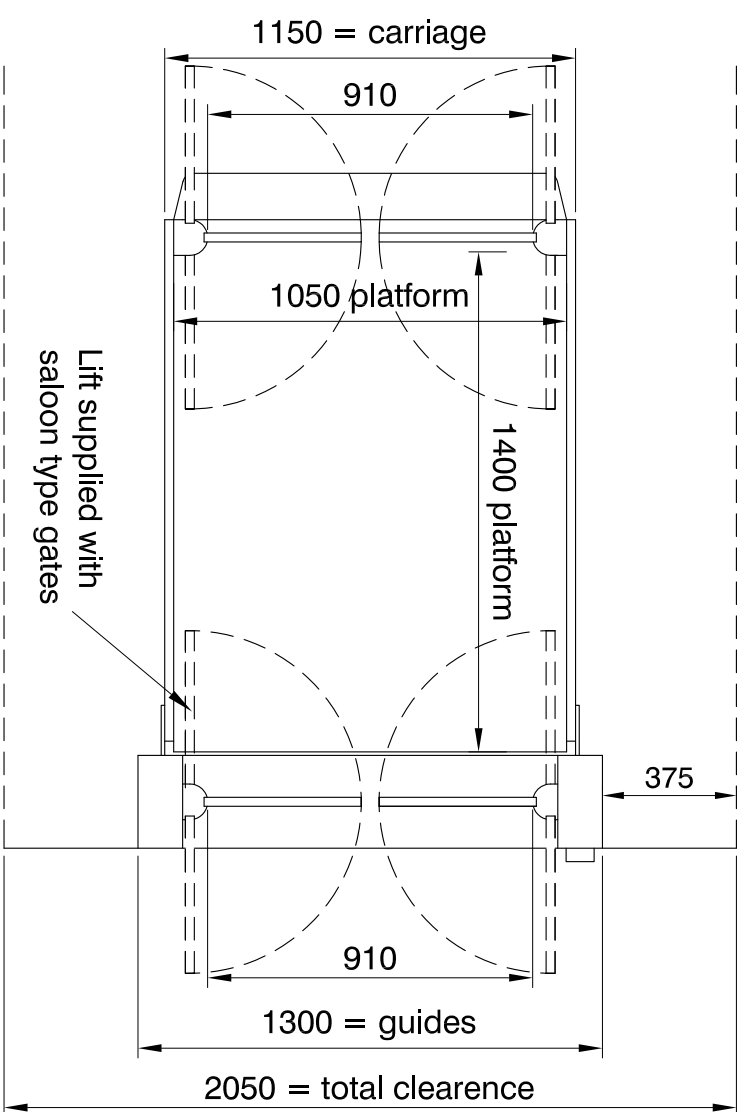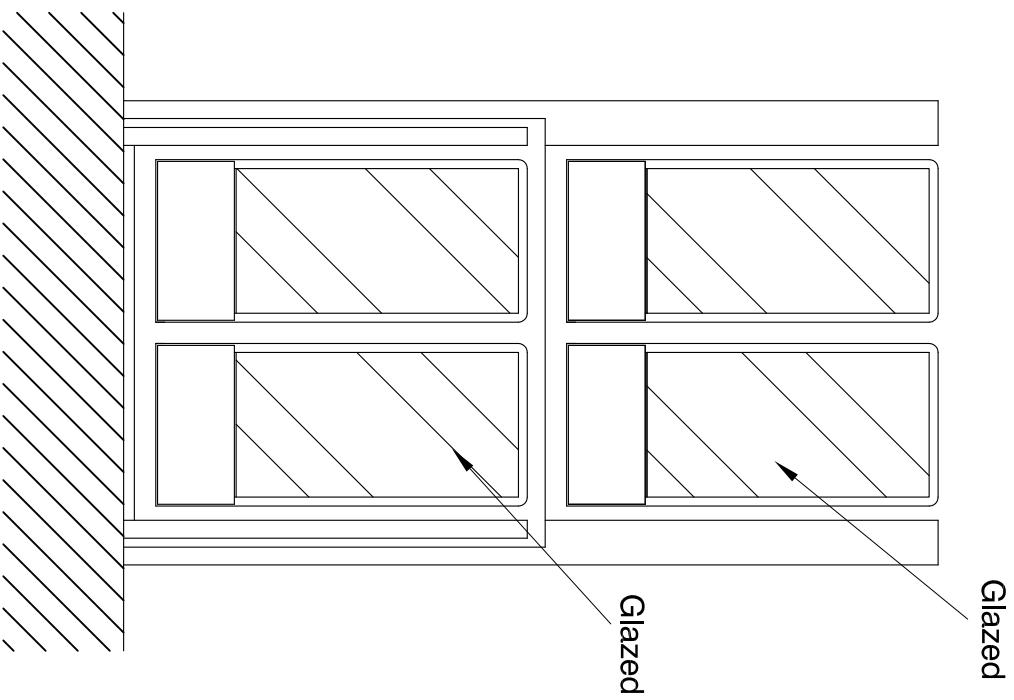

Underside of the platform protected with safety edge

Hissvägen 3  
691 37 Karlskoga, Sweden  
Tel. +46 (0)586-63730  
Fax +46 (0)586-52140  
E-mail - info@ntd.se  
Website - www.ntd.se

TITLE		REV	
<b>B - Type Verticale Platform Lift - 300kg</b>		A	
DWG NO.		---	
SCALE	DATE	DRAWN	
NTS	26/09/06	RH	