

MP | ARESlift

Hydraulic Series "C"

2, 3, 4, 5, 6 passengers

MP205H | MP305H
MP405H | MP505H
MP605H

TECHNICAL SPECIFICATIONS


SERIES "C" WITH MACHINE ROOM

MODEL	MP205H	MP305H	MP405H	MP505H	MP605H
	05H	05H	05H	05H	05H
P	2	3	4	5	6
V	0,5 m/s	0,5 m/s	0,5 m/s	0,5 m/s	0,5 m/s
AH	1060	1160	1260	1360	1360
FH	1750	1100	1225	1300	1450
AC	700	800	900	1000	1000
FC	800	900	1000	1100	1250
CT	480	480	480	480	1.6 m/s
H	2700	2700	2700	2700	2700
F	300	300	300	300	300
Q	150/160	225/240	300/320	375/400	450/480
HC	2100	2100	2100	2100	2100

LEGEND

DIAGRAMS

- P Capacity (Passengers)
- V Speed (m/s)
- AH Shaft width
- FH Shaft depth
- AC Car width
- FC Exterior car depth
- H Clear overhead
- F Pit
- PL Clear entrance
- Q Rated load (kg)
- HC Clear car height (mm)
- R Travel

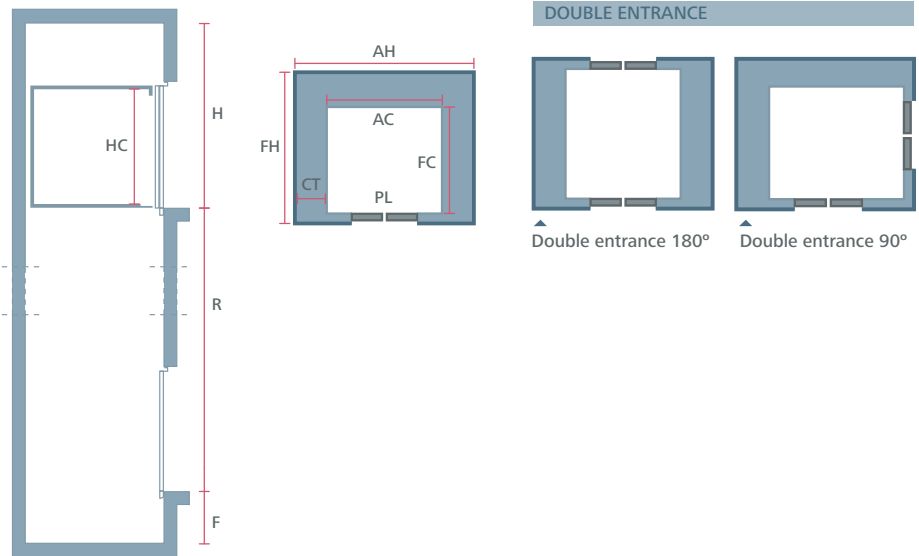

Bus model car door: 2600 mm

MPARESHCENV01



globalNETWORK

MP ALGERIA · MP AUSTRALIA · MP AUSTRIA · MP CZECH REP · MP CHILE · MP CHINA · MP FRANCE · MP GREECE · MP ITALY · MP JORDAN
MP MÉXICO · MP MOROCCO · MP NETHERLANDS · MP POLAND · MP PORTUGAL · MP RUSSIA · MP SPAIN · MP SWEDEN

www.mpelevacion.com

ECOEFICIENCY,
a global aim.

